inverCHLOR

Trusted by
POOL PROFESSIONALS

INTELLIGENT SALT & MINERAL CHLORINATOR

Experience the next level of pool chlorination with inverCHLOR, designed for outstanding performance in salt and mineral pools. With adjustable settings and real-time updates on water chemistry, it maintains optimal conditions throughout the varying seasons.

A standout feature is its high-performance cell, guaranteeing over 10,000 hours of use. inverCHLOR also boasts a UV-protected front cover and a touch screen LCD for easy configuration. All these features come in a compact, robust unit, making installation a breeze. Simplify pool maintenance with Madimack's inverCHLOR salt and mineral chlorinator.



Extended Cell Life
inverCHLOR's intelligent control system optimises cell operation, preventing strain and extending cell life to over 10,000 hours.

Low TDS Compatible
Compatible with ultra-low salt or mineral levels (2000 ppm), inverCHLOR efficiently produces chlorine to maintain optimal pool sanitation.

Modular Cell
Experience easy installation for both new and existing pools with our modular cell. Plus, enjoy the added benefit of optional pH control for optimal pool maintenance.

Controlled Performance & Inverter Tech
Enjoy effortless, efficient performance with adaptive power control that optimises energy use and harnesses the cutting-edge inverter technology to manage your pool all year round.

Synchronised Intelligence
inverCHLOR intelligence allows your Madimack heat pump to run outside of filtration/ chlorination times, while using the same circulation pump.

MANUFACTURER'S WARRANTY
4 YEARS
& 10,000 HOURS ON CELL

PRIORITISING SUSTAINABLE LIVING


madimack

Powered by invermac TECHNOLOGY



TECHNICAL PARAMETERS

Model Name	inverCHLOR 100	inverCHLOR 200	inverCHLOR 300	inverCHLOR 400
Chlorine g/hr 3000ppm	10	20	30	40
Chlorine g/hr 1200ppm	4	9	14	18
Chlorine (lbs/ 24hrs)	0.5	1	1.5	2
Recommended Salt Level	3000ppm			
Max Output (A) (3000ppm / 1200ppm)	4 / 2.6	7 / 4.6	10.5 / 7	14 / 8.4
Cell voltage (V)	12	12	12	12
Power supply (Vac)	100-240v (50/60hz)			
Power Consumption (W)	64	104	151	197
IP Rating	IP65			
Flow rate	80-300lpm			
Operating temperature	-5°C ~ 42°C			
Water temperature	10°C ~ 40°C			
Control unit dimensions	245 × 200 × 80mm			
Cell dimensions	327 × 117 × 150mm			
Water connection	40 & 50mm			
Salinity Measurement Accuracy	+- 500ppm			

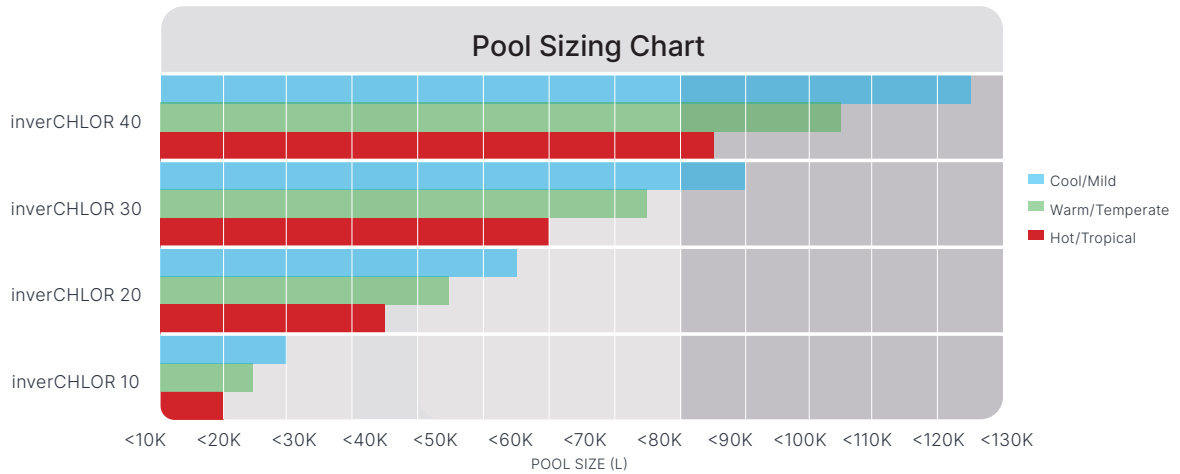

** Pool sizing tested at 3,000ppm
* All measurements calculated at 25 degrees water temperature.
* 10,000 operating hours on the cell.
The Madimack Manufacturer Warranty is available on eligible purchases through Madimack Authorised Dealers and Certified Online Dealers. All Madimack products also include guarantees under the Australian Consumer Law.

madimack