

inverFLOW

Trusted by
POOL PROFESSIONALS



THE SMART CHOICE FOR TOTAL POOL PERFORMANCE.

The Madimack inverFLOW inverter pool pump represents the complete package in pool pump technology. Combining whisper-quiet operation, exceptional energy efficiency and intelligent smart controls, backed by a market-leading 5-year warranty, it's the smart choice for reliable, energy-efficient pool performance.

Engineered for seamless integration with existing plumbing, the inverFLOW is quick to install, simple to replace and built to perform.



AUTOMATION READY

✓ JANDY ✓ PENTAIR ✓ HAYWARD



Smarter Pool Control

Enhanced interface with easy menu access and expanded display



Advanced Sound Suppression Technology

Whisper-quiet operation down to 33 dB



inverMAC Technology

Advanced inverter motor for efficient performance and speed control, dramatically reducing energy use



Dual Voltage

Enables flexible installation and ensures consistent performance regardless of the voltage



Advanced Timer Function

Full control capabilities, with multi-speed and multi-timer function




5-Year Market-Leading Warranty

Long-term peace of mind and product reliability



Wi-Fi Enabled + App Control

Remote operation, scheduling and monitoring from your phone



Skimmer/Boost Mode

Proprietary Madimack tech runs the pump 5 mins/hr, filtering surface debris so pools stay cleaner, longer



madimack

Powered by  **invermac**
TECHNOLOGY


TECHNICAL PARAMETERS




MODEL		M100	M150	M200
SKU		21111	21112	21113
Power				
Voltage range		115 - 230v 50/60Hz		
P1 (HP)		1	1.5	2
P1 (kW)		0.8	1.1	1.5
P2 (THP)		0.85	1.25	1.65
Running Amps (115v/230v)		7.0 - 3.5	8.3 - 4.6	9.6 - 6.5
Circulation (Flow)				
Max Flow (Qmax)	(GPM)	97	110	132
	(LPM)	367	415	500
Head Max (Hmax)	(Feet)	54	59	67
	(Metre)	16.5	18	20.4
Flow @ 26Ft/8m		79/299	99/375	132/ 500
Flow @ 33Ft/10m		68/258	84/318	121/458
Specifications				
Pipe connections (inlet/outlet) (inch/mm)		2.0" / 50 mm		
Noise level 30% Speed dB(A)		32.9	35.8	38.3
Noise level 100% Speed dB(A)		56.1	56.7	57.4
Dimensions	(Inch)	23" 5/8' × 9" 15/16' × 12" 11/16'		
	(mm)	600 × 253 × 322		
Packaging	(Inch)	25" 7/8' × 10" 5/8' × 15" 9/16'		
	(mm)	657 × 270 × 395		
Net Weight	(lb/kg)	33.5lbs/15.2kg	35.7lbs/16.2kg	34.8lbs/15.8kg
Gross Weight	(lb/kg)	39.2lbs/17.8kg	41.4lbs/18.8kg	40.5lbs/18.4kg

*Specifications displayed refer to 230v supply and can vary with voltage fluctuations please visit www.madimack.com for further specifications.


inverFLOW M100

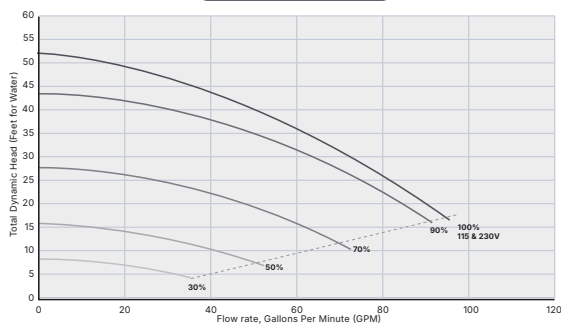

inverFLOW M150

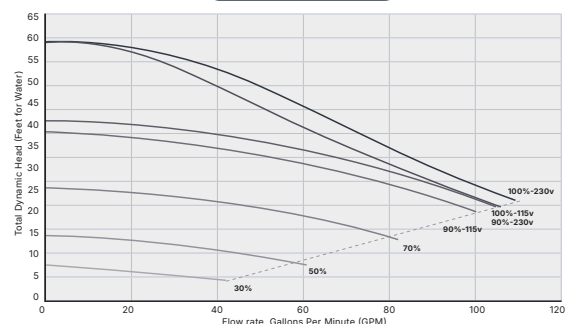

inverFLOW M200

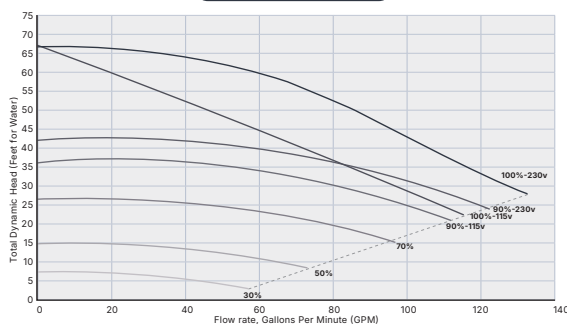

AUTOMATION READY